



Model: NU2256ECMA

Basic size of
 mm

d:	280
D:	500
B:	130

The basic rated load is
 kN

trends C:	2200
static state Co:	3250
Fatigue load limit Pu:	285

Rated rotation speed is
 r/min

Refer to the speed:	1200
limit speed:	1900
quality:	115
model:	NU2256ECMA


Dimensions are
 mm

d:	280
d ₁ ~ :	350
D1 ~ :	433
F,E:	327
r _{1,2} the min:	5
r _{3,4} the min:	5
5 ¹⁾ :	10.2

Shoulder gear and chamfer size
 mm

d _a the min:	300
d _a the max:	320
d _b ,Da the min:	331
Da the max:	480
r _a the max:	4
r _b the max:	4


Calculation coefficient

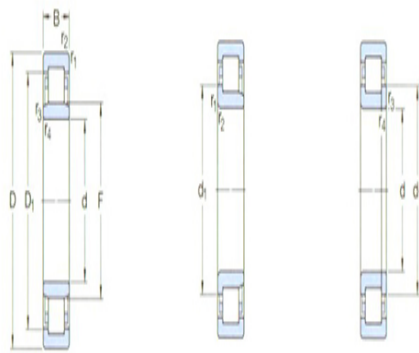

NU

NU

NUP

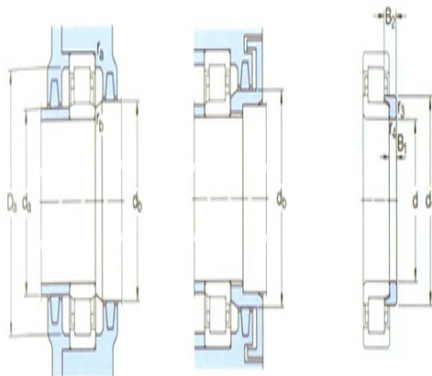

作圖

kr:	0.2
-----	-----

Corner circle

model:	HJ2256EC
quality:	6.75
Size B1:	18
Size B2:	38