



Model: NU2356MA

Basic size of
 mm

d:	280
D:	580
B:	175

The basic rated load is
 kN

trends C:	2700
static state Co:	4300
Fatigue load limit Pu:	365

Rated rotation speed is
 r/min

Refer to the speed:	1000
limit speed:	1700
quality:	230
model:	NU2356M A


Dimensions are
 mm

d:	280
d ₁ ~ :	-
D1 ~ :	467
F,E:	362
r _{1,2} the min:	6
r _{3,4} the min:	6
ξ ¹⁾ :	6.6

Shoulder gear and chamfer size
 mm

d _a the min:	306
d _a the max:	347
d _b ,Da the min:	366
Da the max:	554
r _a the max:	5
r _b the max:	5


Calculation coefficient

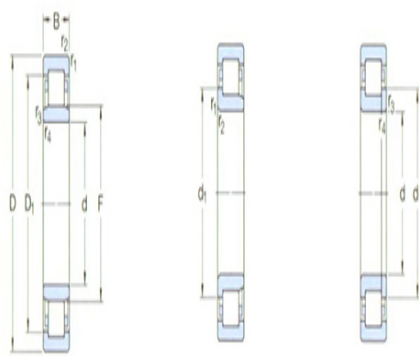

NU

NU

NUP

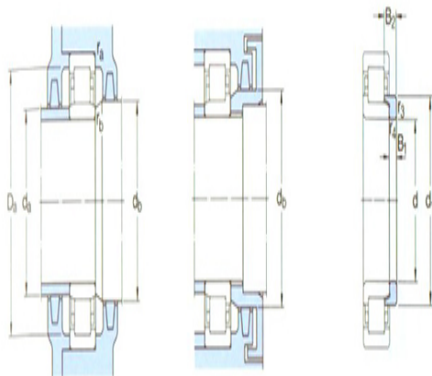

作圖

kr:	0.25
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-