



Model: NU1060MA

Basic size of
 mm

d:	300
D:	460
B:	74

The basic rated load is
 kN

trends C:	858
static state Co:	1370
Fatigue load limit Pu:	129

Rated rotation speed is
 r/min

Refer to the speed:	1500
limit speed:	2000
quality:	46.5
model:	NU1060M A


Dimensions are
 mm

d:	300
d ₁ ~ :	356
D1 ~ :	402
F,E:	340
r _{1,2} the min:	4
r _{3,4} the min:	4
5 ¹⁾ :	9.7

Shoulder gear and chamfer size
 mm

d _a the min:	317
d _a the max:	335
d _b ,Da the min:	344
Da the max:	443
r _a the max:	3
r _b the max:	3


Calculation coefficient

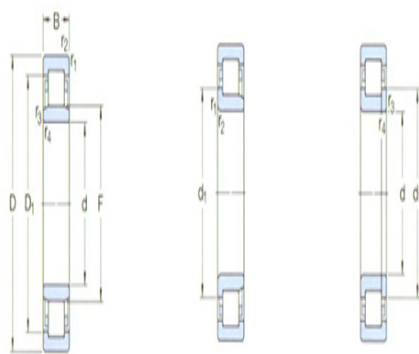

NU

NU

NUP

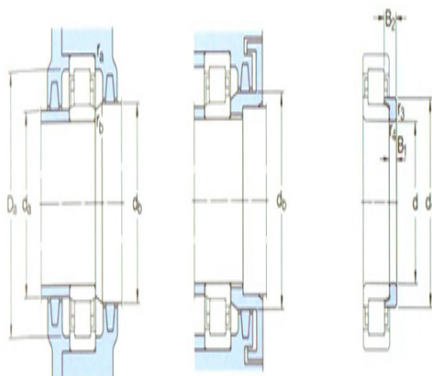

作圖

kr:	0.1
-----	-----

Corner circle

model:	HJ1060
quality:	5.3
Size B1:	19
Size B2:	36