

Model: NU2260MA

Basic size of
 mm

d:	300
D:	540
B:	140

The basic rated load is
 kN

trends C:	2090
static state Co:	3450
Fatigue load limit Pu:	300

Rated rotation speed is
 r/min

Refer to the speed:	1200
limit speed:	1800
quality:	145
model:	NU2260M A


Dimensions are
 mm

d:	300
d ₁ ~ :	-
D1 ~ :	451
F,E:	364
r _{1,2} the min:	5
r _{3,4} the min:	5
ξ ¹⁾ :	5.6

Shoulder gear and chamfer size
 mm

d _a the min:	320
d _a the max:	352
d _b ,Da the min:	368
Da the max:	520
r _a the max:	4
r _b the max:	4


Calculation coefficient

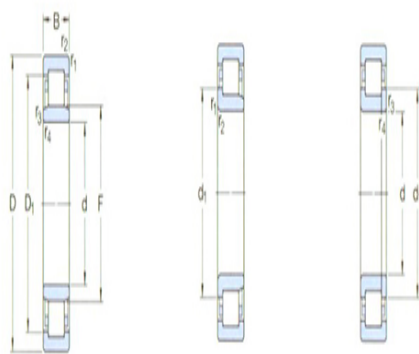

NU

NU

NUP

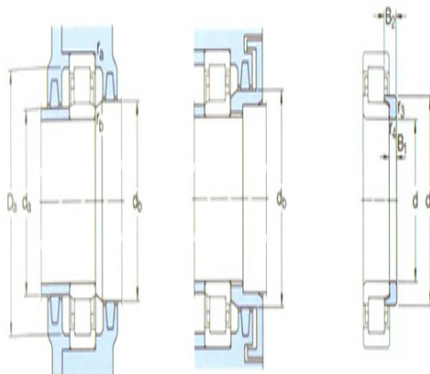

作圖

kr:	0.2
-----	-----

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-