

Model: NU1064MA

Basic size of
mm

d:	320
D:	480
B:	74

The basic rated load is
kN

trends C:	880
static state Co:	1430
Fatigue load limit Pu:	132

Rated rotation speed is
r/min

Refer to the speed:	1400
limit speed:	1900
quality:	48.5
model:	NU1064M A


Dimensions are
mm

d:	320
d ₁ ~ :	376
D1 ~ :	422
F,E:	360
r _{1,2} the min:	4
r _{3,4} the min:	4
5 ¹⁾ :	9.7

Shoulder gear and chamfer size
mm

d _a the min:	335
d _a the max:	355
d _b ,Da the min:	364
Da the max:	465
r _a the max:	3
r _b the max:	3


Calculation coefficient

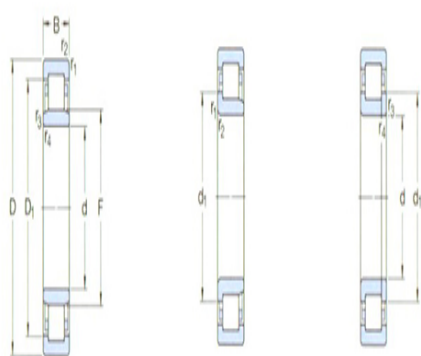

NU

NU

NUP

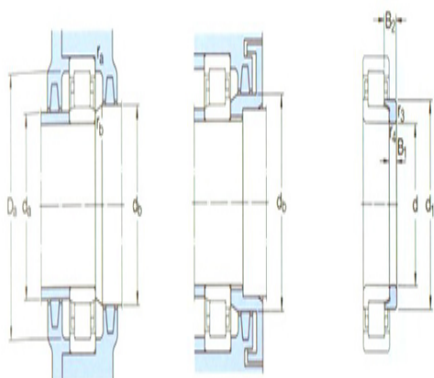

作圖

kr:	0.1
-----	-----

Corner circle

model:	HJ1064
quality:	5.65
Size B1:	19
Size B2:	36