



Model: NU264MA

Basic size of
mm

d:	320
D:	580
B:	92

The basic rated load is
kN

trends C:	1610
static state Co:	2450
Fatigue load limit Pu:	204

Rated rotation speed is
r/min

Refer to the speed:	1200
limit speed:	1600
quality:	115
model:	NU264MA

Dimensions are
mm


d:	320
$d_1 \sim$:	-
D1 \sim :	485
F,E:	390
$r_{1,2}$ the min:	5
$r_{3,4}$ the min:	5
s^1):	5.3

Shoulder gear and chamfer size
mm

d_a the min:	340
d_a the max:	383
d_b, D_a the min:	394
Da the max:	560
r_a the max:	4
r_b the max:	4

Calculation coefficient


kr:	0.15
-----	------

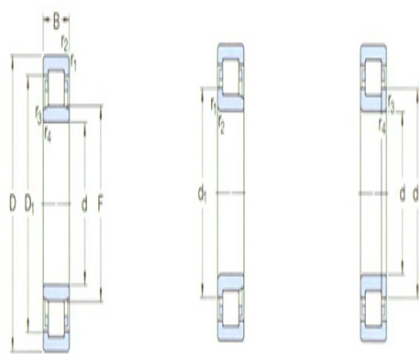

NU

NU

NUP

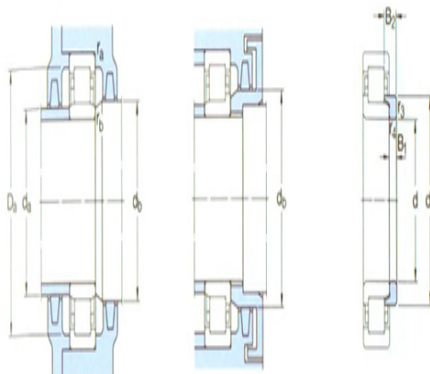

作圖

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-