

Model: NU1068MA

Basic size of
 mm

| | |
|----|-----|
| d: | 340 |
| D: | 520 |
| B: | 82 |

The basic rated load is
 kN

| | |
|------------------------|------|
| trends C: | 1080 |
| static state Co: | 1760 |
| Fatigue load limit Pu: | 156 |

Rated rotation speed is
 r/min

| | |
|---------------------|--------------|
| Refer to the speed: | 1300 |
| limit speed: | 1700 |
| quality: | 65 |
| model: | NU1068M A |


Dimensions are
 mm

| | |
|---------------------------|-----|
| d: | 340 |
| d ₁ ~ : | 403 |
| D1 ~ : | 455 |
| F,E: | 385 |
| r _{1,2} the min: | 5 |
| r _{3,4} the min: | 5 |
| 5 ¹⁾ : | 6.5 |

Shoulder gear and chamfer size
 mm

| | |
|-----------------------------|-----|
| d _a the min: | 358 |
| d _a the max: | 380 |
| d _b ,Da the min: | 389 |
| Da the max: | 502 |
| r _a the max: | 4 |
| r _b the max: | 4 |


Calculation coefficient

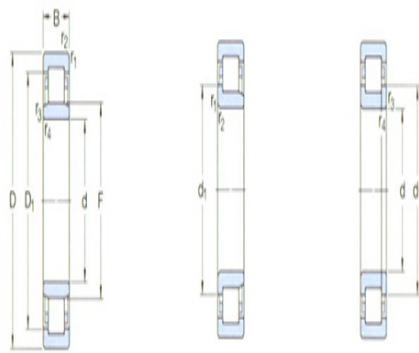

NU

NU

NUP

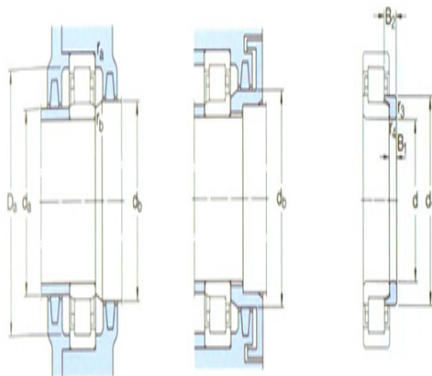

作圖

| | |
|-----|-----|
| kr: | 0.1 |
|-----|-----|

Corner circle

| | |
|----------|--------|
| model: | HJ1068 |
| quality: | 7.4 |
| Size B1: | 21 |
| Size B2: | 39.5 |