

Model: NU2268MA

Basic size of
 mm

d:	340
D:	620
B:	165

The basic rated load is
 kN

trends C:	2640
static state Co:	4500
Fatigue load limit Pu:	365

Rated rotation speed is
 r/min

Refer to the speed:	1000
limit speed:	1500
quality:	220
model:	NU2268M A


Dimensions are
 mm

d:	340
d ₁ ~ :	-
D1 ~ :	515
F,E:	416
r _{1,2} the min:	6
r _{3,4} the min:	6
s ¹⁾ :	8

Shoulder gear and chamfer size
 mm

d _a the min:	366
d _a the max:	401
d _b ,Da the min:	421
Da the max:	594
r _a the max:	5
r _b the max:	5


Calculation coefficient

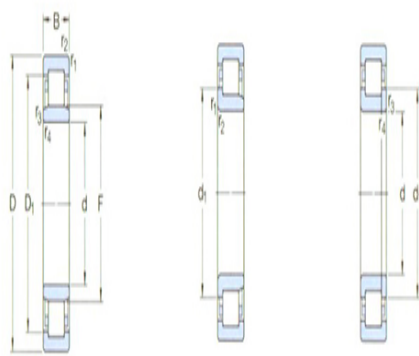

NU

NU

NUP

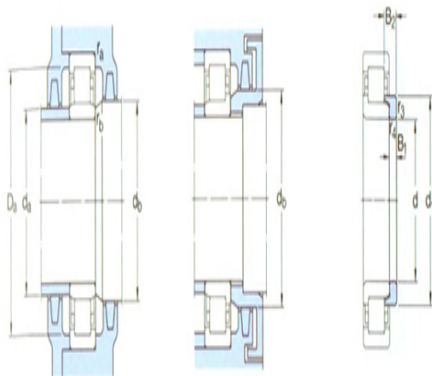

作圖

kr:	0.2
-----	-----

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-