

**Model: NU2272MA**

Basic size of  
 mm

d:	360
D:	650
B:	170

The basic rated load is  
 kN

trends C:	2920
static state Co:	4900
Fatigue load limit Pu:	400

Rated rotation speed is  
 r/min

Refer to the speed:	950
limit speed:	1400
quality:	250
model:	NU2272M A


Dimensions are  
 mm

d:	360
d <sub>1</sub> ~ :	-
D1 ~ :	542
F,E:	437
r <sub>1,2</sub> the min:	6
r <sub>3,4</sub> the min:	6
ξ <sup>1)</sup> :	16.7

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	386
d <sub>a</sub> the max:	428
d <sub>b</sub> ,Da the min:	442
Da the max:	624
r <sub>a</sub> the max:	5
r <sub>b</sub> the max:	5


Calculation coefficient

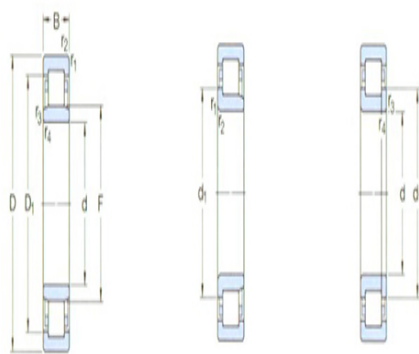

NU

NU

NUP

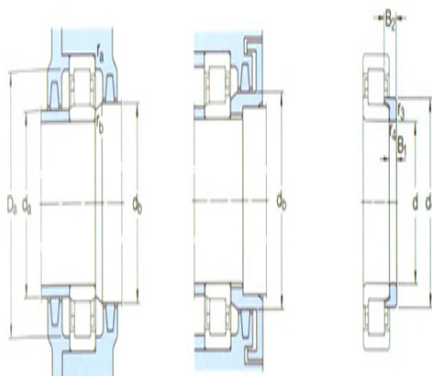

作圖

kr:	0.2
-----	-----

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-