



Model: NU1076MA

Basic size of
 mm

d:	380
D:	560
B:	82

The basic rated load is
 kN

trends C:	1140
static state Co:	1930
Fatigue load limit Pu:	170

Rated rotation speed is
 r/min

Refer to the speed:	1200
limit speed:	1600
quality:	71
model:	NU1076M A


Dimensions are
 mm

d:	380
d ₁ ~ :	443
D1 ~ :	495
F,E:	425
r _{1,2} the min:	5
r _{3,4} the min:	5
ξ ¹⁾ :	10.8

Shoulder gear and chamfer size
 mm

d _a the min:	398
d _a the max:	420
d _b ,Da the min:	430
Da the max:	542
r _a the max:	4
r _b the max:	4


Calculation coefficient

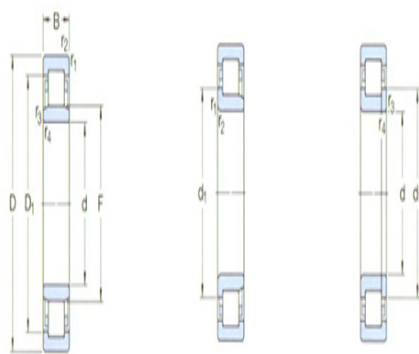

NU

NU

NUP

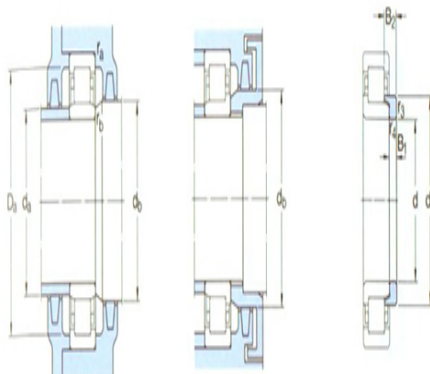

作圖

kr:	0.1
-----	-----

Corner circle

model:	HJ1076
quality:	8.25
Size B1:	21
Size B2:	39.5