



**Model: NU2276ECMA**

Basic size of  
mm

|    |     |
|----|-----|
| d: | 380 |
| D: | 680 |
| B: | 175 |

The basic rated load is  
kN

|                        |      |
|------------------------|------|
| trends C:              | 3140 |
| static state Co:       | 5500 |
| Fatigue load limit Pu: | 440  |

Rated rotation speed is  
r/min

|                     |            |
|---------------------|------------|
| Refer to the speed: | 900        |
| limit speed:        | 1600       |
| quality:            | 275        |
| model:              | NU2276ECMA |


Dimensions are  
mm

|                           |     |
|---------------------------|-----|
| d:                        | 380 |
| d <sub>1</sub> ~ :        | -   |
| D1 ~ :                    | 595 |
| F,E:                      | 451 |
| r <sub>1,2</sub> the min: | 6   |
| r <sub>3,4</sub> the min: | 6   |
| s <sup>1)</sup> :         | 8.3 |

Shoulder gear and chamfer size  
mm

|                             |     |
|-----------------------------|-----|
| d <sub>a</sub> the min:     | 406 |
| d <sub>a</sub> the max:     | 447 |
| d <sub>b</sub> ,Da the min: | 455 |
| Da the max:                 | 654 |
| r <sub>a</sub> the max:     | 5   |
| r <sub>b</sub> the max:     | 5   |


Calculation coefficient

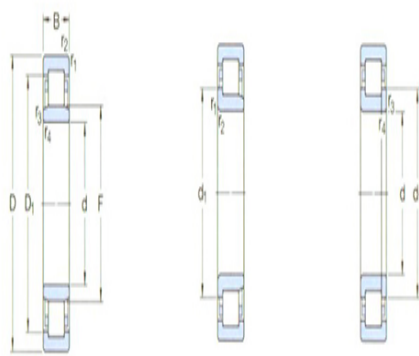

NU

NU

NUP

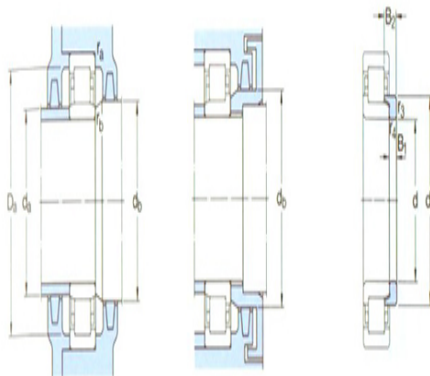

作圖

|     |     |
|-----|-----|
| kr: | 0.2 |
|-----|-----|

Corner circle

|          |   |
|----------|---|
| model:   | - |
| quality: | - |
| Size B1: | - |
| Size B2: | - |