



Model: NU1084MA

Basic size of
 mm



| | |
|----|-----|
| d: | 420 |
| D: | 620 |
| B: | 90 |

The basic rated load is
 kN

| | |
|------------------------|------|
| trends C: | 1420 |
| static state Co: | 2450 |
| Fatigue load limit Pu: | 212 |

Rated rotation speed is
 r/min

| | |
|---------------------|--------------|
| Refer to the speed: | 1100 |
| limit speed: | 1400 |
| quality: | 96 |
| model: | NU1084M A |

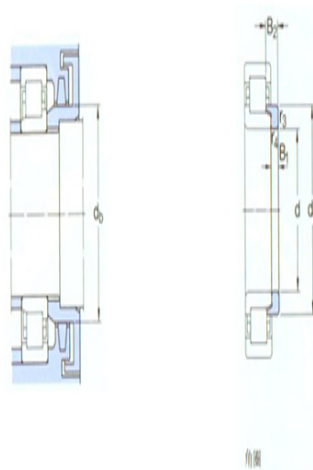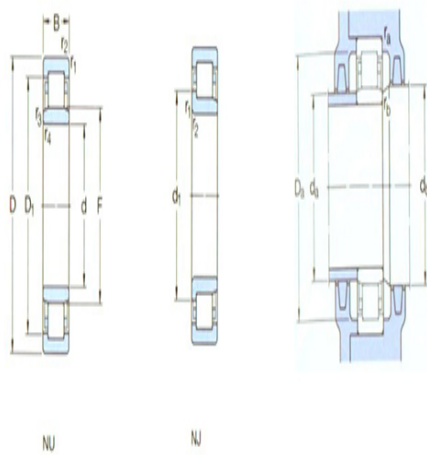

Dimensions are
 mm

| | |
|---------------------------|-----|
| d: | 420 |
| d ₁ ~ : | 490 |
| D ₁ ~ : | 547 |
| F,E: | 470 |
| r _{1,2} the min: | 5 |
| r _{3,4} the min: | 5 |
| s ¹⁾ : | 14 |

Shoulder gear and chamfer size
 mm

| | |
|---|-----|
| d _a the min: | 438 |
| d _a the max: | 466 |
| d _b ,D _a the min: | 475 |
| D _a the max: | 602 |
| r _a the max: | 4 |
| r _b the max: | 4 |

Calculation coefficient

| | |
|-----|-----|
| kr: | 0.1 |
|-----|-----|

Corner circle

| | |
|----------|--------|
| model: | HJ1084 |
| quality: | 10 |
| Size B1: | 23 |
| Size B2: | 43 |