



Model: NU1088MA

Basic size of
mm

d:	440
D:	650
B:	94

The basic rated load is
kN

trends C:	1510
static state Co:	2650
Fatigue load limit Pu:	212

Rated rotation speed is
r/min

Refer to the speed:	1000
limit speed:	1300
quality:	105
model:	NU1088M A


Dimensions are
mm

d:	440
d ₁ ~ :	512
D1 ~ :	574
F,E:	493
r _{1,2} the min:	6
r _{3,4} the min:	6
s ¹⁾ :	14.7

Shoulder gear and chamfer size
mm


d _a the min:	463
d _a the max:	488
d _b ,Da the min:	498
Da the max:	627
r _a the max:	5
r _b the max:	5

Calculation coefficient

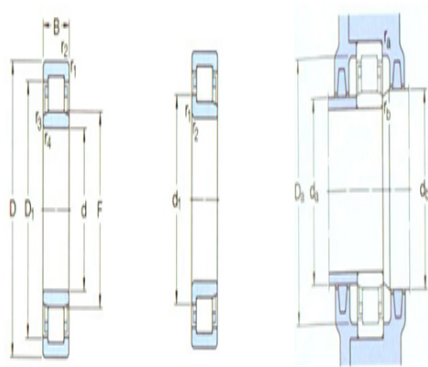

NU

NJ

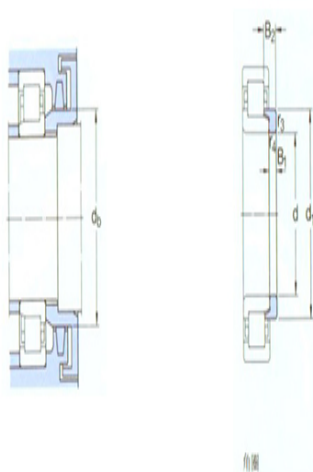

kr:	0.1
-----	-----

Corner circle

model:	HJ1088
quality:	11.5
Size B1:	24
Size B2:	45