

Model: NU1092MA

Basic size of
mm

| | |
|----|-----|
| d: | 460 |
| D: | 680 |
| B: | 100 |

The basic rated load is
kN

| | |
|---------------------------|------|
| trends C: | 1650 |
| static state Co: | 2850 |
| Fatigue load limit Pu: | 224 |

Rated rotation speed is
r/min

| | |
|---------------------|--------------|
| Refer to the speed: | 950 |
| limit speed: | 1200 |
| quality: | 115 |
| model: | NU1092M A |


Dimensions are
mm

| | |
|---------------------------|------|
| d: | 460 |
| d ₁ ~ : | 537 |
| D ₁ ~ : | 600 |
| F,E: | 516 |
| r _{1,2} the min: | 6 |
| r _{3,4} the min: | 6 |
| 5 ¹⁾ : | 15.9 |

Shoulder gear and chamfer size
mm


| | |
|---|-----|
| d _a the min: | 483 |
| d _a the max: | 511 |
| d _b ,D _a the min: | 521 |
| D _a the max: | 657 |
| r _a the max: | 5 |
| r _b the max: | 5 |

Calculation coefficient

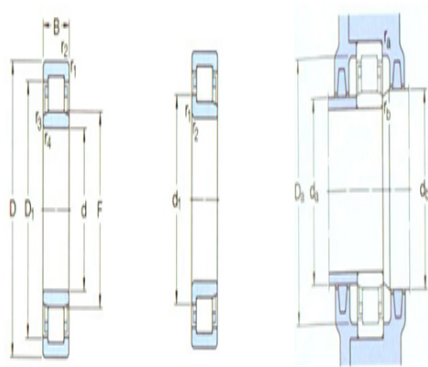

NU

NJ

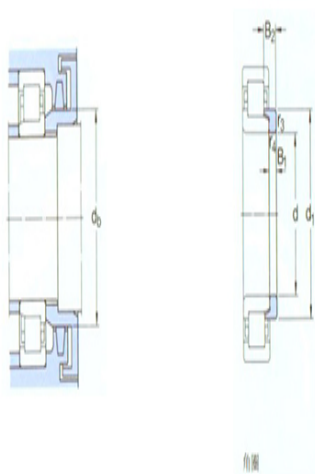

角圖

| | |
|-----|-----|
| kr: | 0.1 |
|-----|-----|

Corner circle

| | |
|----------|--------|
| model: | HJ1092 |
| quality: | 14 |
| Size B1: | 25 |
| Size B2: | 48 |