



**Model: NU1292MA**

Basic size of  
 mm



d:	460
D:	830
B:	165

The basic rated load is  
 kN

trends C:	4180
static state Co:	6800
Fatigue load limit Pu:	510

Rated rotation speed is  
 r/min

Refer to the speed:	750
limit speed:	1100
quality:	415
model:	NU1292M A

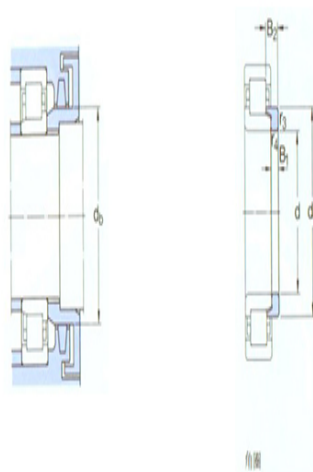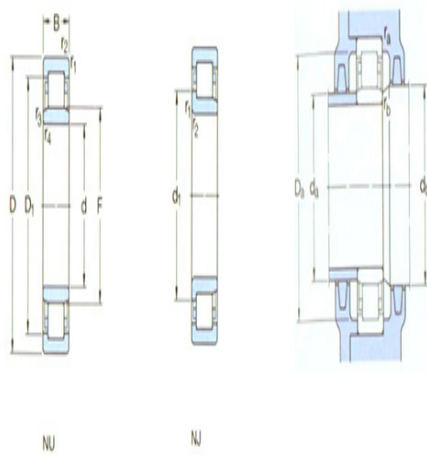

Dimensions are  
 mm

d:	460
d <sub>1</sub> ~ :	-
D <sub>1</sub> ~ :	715
F,E:	554
r <sub>1,2</sub> the min:	7.5
r <sub>3,4</sub> the min:	7.5
s <sup>1)</sup> :	6.4

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	492
d <sub>a</sub> the max:	542
d <sub>b</sub> ,D <sub>a</sub> the min:	559
D <sub>a</sub> the max:	798
r <sub>a</sub> the max:	6
r <sub>b</sub> the max:	6

Calculation coefficient

kr:	0.14
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-