

Model: NU2292MA

Basic size of
mm

d:	460
D:	830
B:	212

The basic rated load is
kN

trends C:	5120
static state Co:	8650
Fatigue load limit Pu:	655

Rated rotation speed is
r/min

Refer to the speed:	700
limit speed:	1100
quality:	530
model:	NU2292M A


Dimensions are
mm

d:	460
d ₁ ~ :	-
D ₁ ~ :	706
F,E:	554
r _{1,2} the min:	7.5
r _{3,4} the min:	7.5
5 ¹⁾ :	16.5

Shoulder gear and chamfer size
mm


d _a the min:	492
d _a the max:	542
d _b ,D _a the min:	559
D _a the max:	798
r _a the max:	6
r _b the max:	6

Calculation coefficient

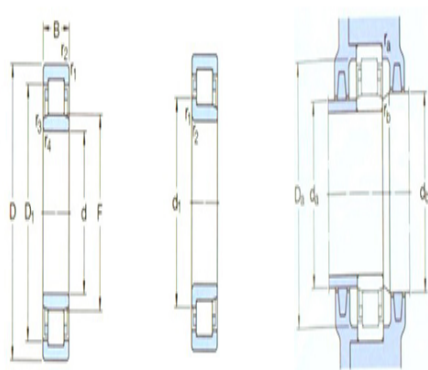

NU

NJ

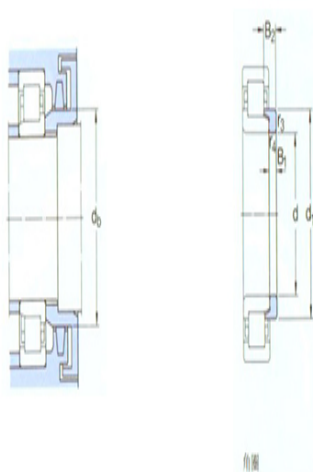

角圖

kr:	0.2
-----	-----

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-