



### Model: NU1096MA

Basic size of  
mm

d:	480
D:	700
B:	100

The basic rated load is  
kN

trends C:	1680
static state Co:	3000
Fatigue load limit Pu:	232

Rated rotation speed is  
r/min

Refer to the speed:	900
limit speed:	1200
quality:	130
model:	NU1096M A


Dimensions are  
mm

d:	480
d <sub>1</sub> ~ :	557
D <sub>1</sub> ~ :	620
F,E:	536
r <sub>1,2</sub> the min:	6
r <sub>3,4</sub> the min:	6
5 <sup>1)</sup> :	15.9

Shoulder gear and chamfer size  
mm


d <sub>a</sub> the min:	503
d <sub>a</sub> the max:	531
d <sub>b</sub> ,D <sub>a</sub> the min:	541
D <sub>a</sub> the max:	677
r <sub>a</sub> the max:	5
r <sub>b</sub> the max:	5

Calculation coefficient

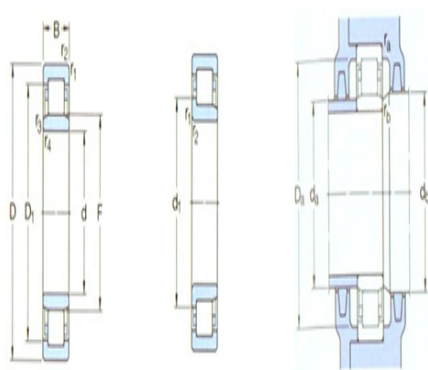

NU

NJ

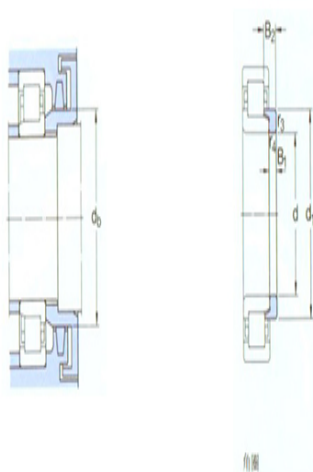

角圖

kr:	0.1
-----	-----

Corner circle

model:	HJ1096
quality:	14.5
Size B1:	25
Size B2:	48