



Model: NU10/500MA

Basic size of
mm

| | |
|----|-----|
| d: | 500 |
| D: | 720 |
| B: | 100 |

The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 1720 |
| static state Co: | 3100 |
| Fatigue load limit Pu: | 236 |

Rated rotation speed is
r/min

| | |
|---------------------|----------------|
| Refer to the speed: | 900 |
| limit speed: | 1100 |
| quality: | 135 |
| model: | NU10/500M A |


Dimensions are
mm

| | |
|---------------------------|------|
| d: | 500 |
| d ₁ ~ : | 577 |
| D ₁ ~ : | 640 |
| F,E: | 556 |
| r _{1,2} the min: | 6 |
| r _{3,4} the min: | 6 |
| s ¹⁾ : | 11.2 |

Shoulder gear and chamfer size
mm


| | |
|-----------------------------------------|-----|
| d _a the min: | 523 |
| d _a the max: | 550 |
| d _b ,D _a the min: | 561 |
| D _a the max: | 697 |
| r _a the max: | 5 |
| r _b the max: | 5 |

Calculation coefficient

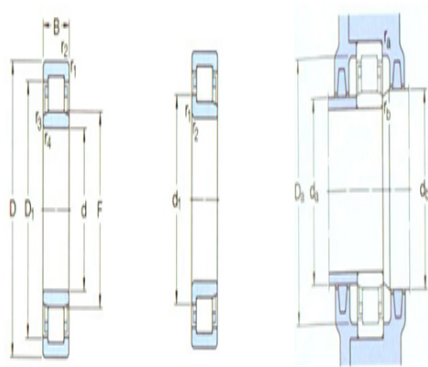

NU

NJ

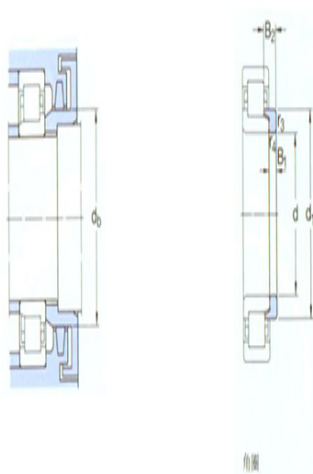

角圖

| | |
|-----|-----|
| kr: | 0.1 |
|-----|-----|

Corner circle

| | |
|----------|----------|
| model: | HJ10/500 |
| quality: | 15 |
| Size B1: | 25 |
| Size B2: | 48 |