



Model: NU12/500MA

Basic size of
mm

d:	500
D:	920
B:	185

The basic rated load is
kN

trends C:	5280
static state Co:	8500
Fatigue load limit Pu:	620

Rated rotation speed is
r/min

Refer to the speed:	670
limit speed:	950
quality:	585
model:	NU12/500M A


Dimensions are
mm

d:	500
d ₁ ~ :	-
D ₁ ~ :	728
F,E:	576
r _{1,2} the min:	7.5
r _{3,4} the min:	7.5
s ¹⁾ :	14.5

Shoulder gear and chamfer size
mm


d _a the min:	532
d _a the max:	564
d _b ,D _a the min:	581
D _a the max:	798
r _a the max:	6
r _b the max:	6

Calculation coefficient

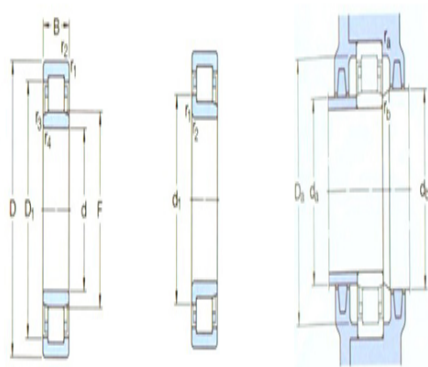

NU

NJ

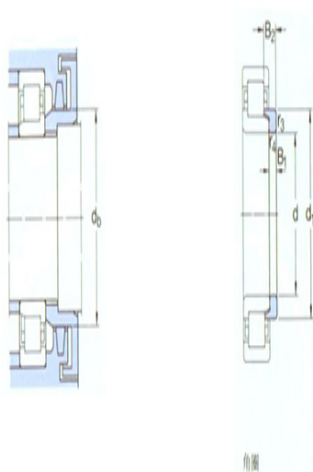

角鋼

kr:	0.21
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-