

Model: NU10/530MA

Basic size of
mm

d:	530
D:	780
B:	112

The basic rated load is
kN

trends C:	2290
static state Co:	4050
Fatigue load limit Pu:	305

Rated rotation speed is
r/min

Refer to the speed:	800
limit speed:	1000
quality:	190
model:	NU10/530M A


Dimensions are
mm

d:	530
d ₁ ~ :	-
D ₁ ~ :	692
F,E:	593
r _{1,2} the min:	6
r _{3,4} the min:	6
5 ¹⁾ :	10.4

Shoulder gear and chamfer size
mm


d _a the min:	553
d _a the max:	585
d _b ,D _a the min:	598
D _a the max:	757
r _a the max:	5
r _b the max:	5

Calculation coefficient

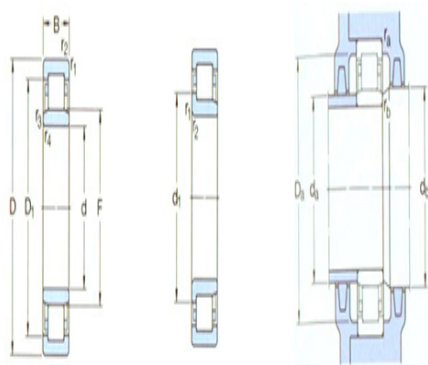

NU

NJ

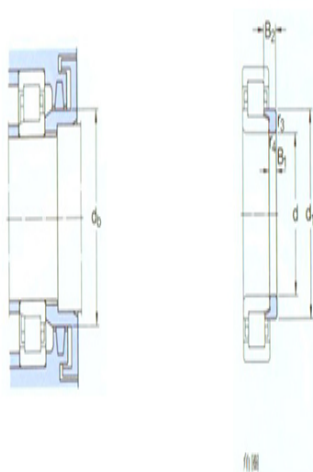

角鋼

kr:	0.1
-----	-----

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-