



Model: NU20/530ECMA

Basic size of
mm


d:	530
D:	780
B:	145

The basic rated load is
kN

trends C:	3740
static state Co:	7350
Fatigue load limit Pu:	550


Rated rotation speed is
r/min

Refer to the speed:	670
limit speed:	1000
quality:	255
model:	NU20/530ECMA

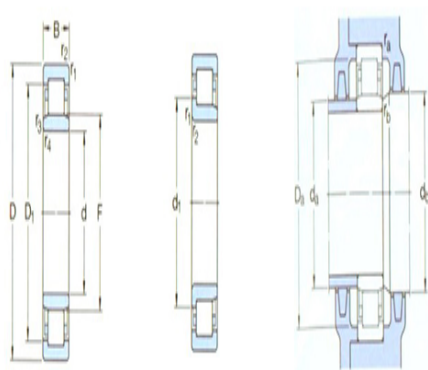

NU

NU

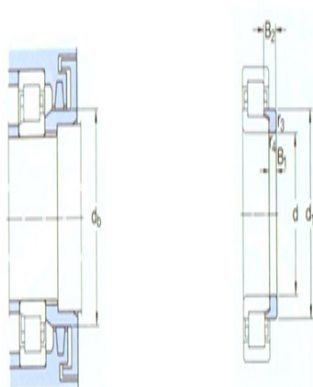

角圖

Dimensions are
mm

d:	530
d ₁ ~ :	-
D ₁ ~ :	704
F,E:	591
r _{1,2} the min:	6
r _{3,4} the min:	6
s ¹⁾ :	6.8

Shoulder gear and chamfer size
mm

d _a the min:	553
d _a the max:	587
d _b ,D _a the min:	596
D _a the max:	757
r _a the max:	5
r _b the max:	5

Calculation coefficient

kr:	0.14
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-