



**Model: NU10/560MA**

Basic size of  
 mm

d:	560
D:	820
B:	115

The basic rated load is  
 kN

trends C:	2330
static state Co:	4250
Fatigue load limit Pu:	310

Rated rotation speed is  
 r/min

Refer to the speed:	750
limit speed:	1000
quality:	210
model:	NU10/560M A


Dimensions are  
 mm

d:	560
d <sub>1</sub> ~ :	648
D <sub>1</sub> ~ :	726
F,E:	625
r <sub>1,2</sub> the min:	6
r <sub>3,4</sub> the min:	6
5 <sup>1)</sup> :	12.3


Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	583
d <sub>a</sub> the max:	617
d <sub>b</sub> ,D <sub>a</sub> the min:	630
D <sub>a</sub> the max:	797
r <sub>a</sub> the max:	5
r <sub>b</sub> the max:	5

Calculation coefficient

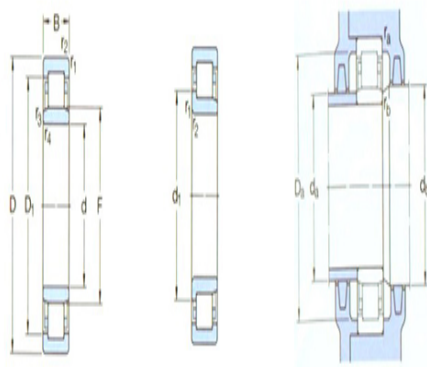

NU NJ

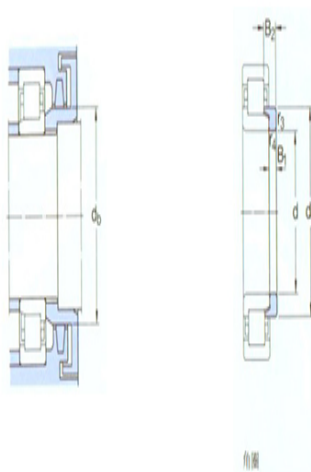

角圖

kr:	0.1
-----	-----

Corner circle

model:	HJ10/560
quality:	21
Size B1:	27.5
Size B2:	53