



Model: NU10/600N2MA

Basic size of
 mm


d:	600
D:	870
B:	118

The basic rated load is
 kN


trends C:	2750
static state Co:	5100
Fatigue load limit Pu:	365

Rated rotation speed is
 r/min

Refer to the speed:	700
limit speed:	900
quality:	245
model:	NU10/600N2M A

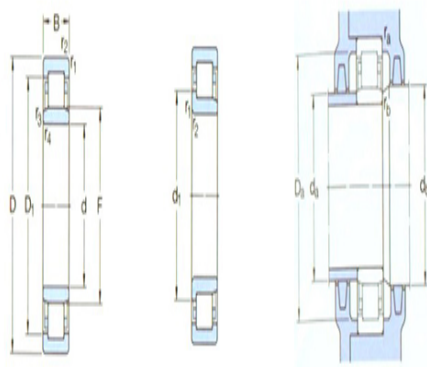

NU NJ

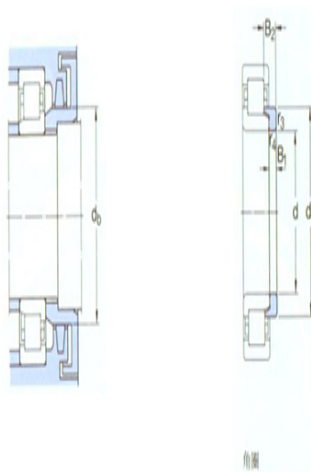

Dimensions are
 mm

d:	600
d ₁ ~ :	695
D ₁ ~ :	779
F,E:	667
r _{1,2} the min:	6
r _{3,4} the min:	6
s ¹⁾ :	14

Shoulder gear and chamfer size
 mm

d _a the min:	623
d _a the max:	658
d _b ,D _a the min:	672
D _a the max:	847
r _a the max:	5
r _b the max:	5

Calculation coefficient

kr:	0.1
-----	-----

Corner circle

model:	HJ10/600
--------	----------

quality:	27.5
----------	------

Size B1:	-
----------	---

Size B2:	55
----------	----