



Model: NU20/600ECMA

Basic size of
mm

d:	600
D:	870
B:	155

The basic rated load is
kN

trends C:	4180
static state Co:	8000
Fatigue load limit Pu:	570

Rated rotation speed is
r/min


Refer to the speed:	600
limit speed:	900
quality:	325
model:	NU20/600ECMA

Dimensions are
mm

d:	600
d ₁ ~ :	-
D1 ~ :	793
F,E:	661
r _{1,2} the min:	6
r _{3,4} the min:	6
s ¹⁾ :	6.1


Shoulder gear and chamfer size
mm

d _a the min:	623
d _a the max:	652
d _b ,D _a the min:	667
D _a the max:	847
r _a the max:	5
r _b the max:	5

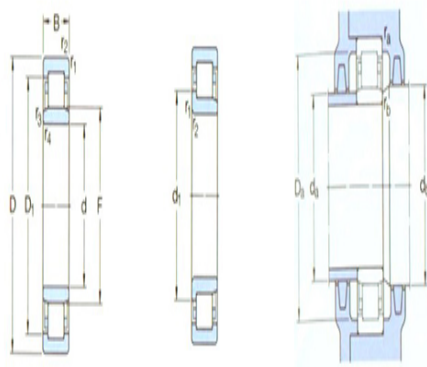

NU

NU

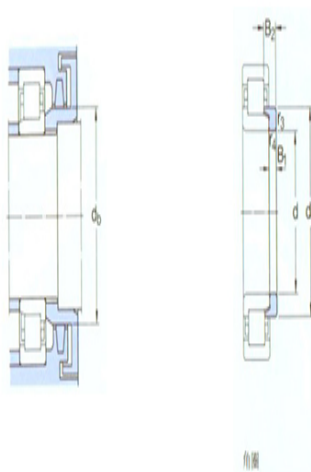

角圖

Calculation coefficient

kr:	0.14
-----	------

Corner circle

model:	-
--------	---

quality:	-
----------	---

Size B1:	-
----------	---

Size B2:	-
----------	---