

Model: NU2/600ECMA/HB

1

Basic size of
mm


d:	600
D:	1090
B:	155

The basic rated load is
kN

trends C:	5610
static state Co:	9800
Fatigue load limit	670
Pu:	


Rated rotation speed is
r/min

Refer to the speed:	480
limit speed:	850
quality:	710
model:	NU2/600ECMA/HB 1

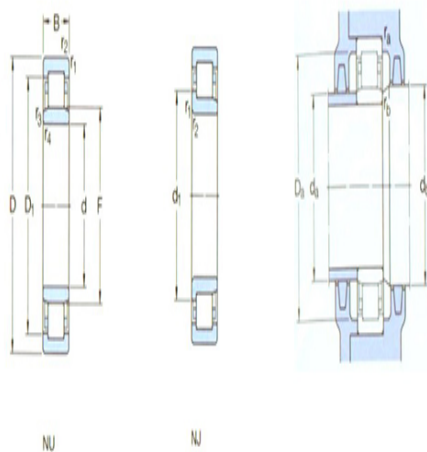

NU

NU

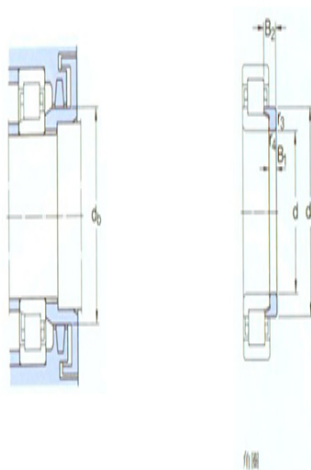

Dimensions are
mm

d:	600
d ₁ ~ :	-
D1 ~ :	925
F,E:	749
r _{1,2} the min:	9.5
r _{3,4} the min:	9.5
s ¹⁾ :	3

Shoulder gear and chamfer size
mm

d _a the min:	640
d _a the max:	743
d _b ,Da the min:	755

Da the max: 1050

r_a the max: 8

r_b the max: 8

Calculation coefficient

kr: 0.17

Corner circle

model: -

quality: -

Size B1: -

Size B2: -