



Model: NU10/630ECN2M

A

Basic size of
mm

d:	630
D:	920
B:	128

The basic rated load is
kN

trends C:	3410
static state Co:	6200
Fatigue load limit	430
Pu:	

Rated rotation speed is
r/min


Refer to the speed:	630
limit speed:	1000
quality:	285
model:	NU10/630ECN2M A

Dimensions are
mm

d:	630
d ₁ ~ :	-
D1 ~ :	837
F,E:	702
r _{1,2} the min:	7.5
r _{3,4} the min:	7.5
s ¹⁾ :	6.2


Shoulder gear and chamfer size
mm

d _a the min:	658
d _a the max:	691
d _b ,D _a the min:	706
Da the max:	892
r _a the max:	6

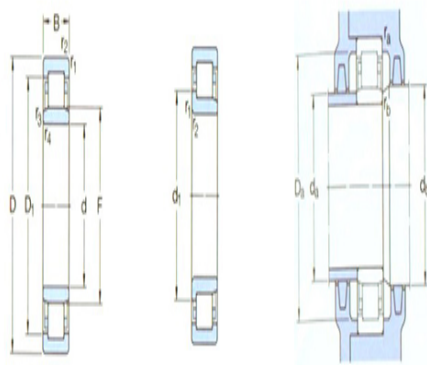

NU

NU

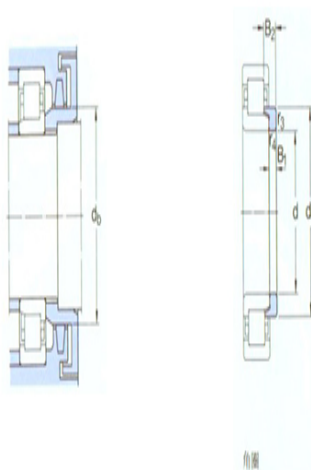

角鋼

r_b the max: 6

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -