

## Model: NU20/630ECMA

Basic size of  
mm


d:	630
D:	920
B:	170

The basic rated load is  
kN

trends C:	4730
static state Co:	9500
Fatigue load limit Pu:	670


Rated rotation speed is  
r/min

Refer to the speed:	560
limit speed:	850
quality:	400
model:	NU20/630ECMA
	A

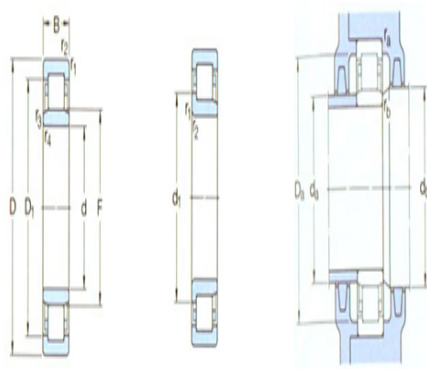

NU

NU

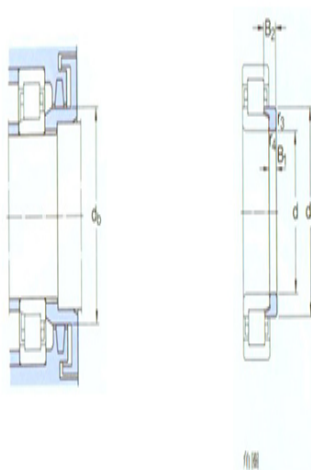

Dimensions are  
mm

d:	630
d <sub>1</sub> ~ :	-
D <sub>1</sub> ~ :	832
F,E:	699
r <sub>1,2</sub> the min:	7.5
r <sub>3,4</sub> the min:	7.5
s <sup>1)</sup> :	8.7

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	658
d <sub>a</sub> the max:	690
d <sub>b</sub> ,D <sub>a</sub> the min:	705
D <sub>a</sub> the max:	892
r <sub>a</sub> the max:	6
r <sub>b</sub> the max:	6

#### Calculation coefficient

kr:	0.14
-----	------

#### Corner circle

model:	-
--------	---

quality:	-
----------	---

Size B1:	-
----------	---

Size B2:	-
----------	---