



Model: NU10/670ECMA

Basic size of
mm

d:	670
D:	980
B:	136

The basic rated load is
kN

trends C:	3740
static state Co:	6800
Fatigue load limit Pu:	465

Rated rotation speed is
r/min


Refer to the speed:	530
limit speed:	800
quality:	350
model:	NU10/670ECM A

Dimensions are
mm

d:	670
d ₁ ~ :	-
D1 ~ :	891
F,E:	747
r _{1,2} the min:	7.5
r _{3,4} the min:	7.5
s ¹⁾ :	7.9


Shoulder gear and chamfer size
mm

d _a the min:	698
d _a the max:	736
d _b ,D _a the min:	753
D _a the max:	952
r _a the max:	6
r _b the max:	6

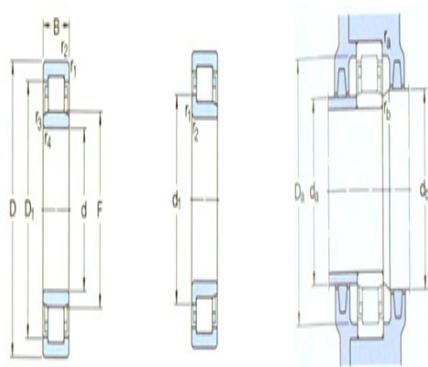

NU

NJ

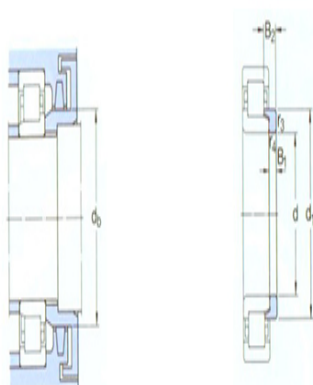

角圖

Calculation coefficient

kr:	0.1
-----	-----

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-