

Model: NU10/710ECN2M

A

Basic size of
mm

d:	710
D:	1030
B:	140

The basic rated load is
kN

trends C:	4680
static state Co:	8500
Fatigue load limit	570
Pu:	

Rated rotation speed is
r/min


Refer to the speed:	500
limit speed:	750
quality:	415
model:	NU10/710ECN2M A

Dimensions are
mm

d:	710
d ₁ ~ :	-
D1 ~ :	939
F,E:	778
r _{1,2} the min:	7.5
r _{3,4} the min:	7.5
s ¹⁾ :	8


Shoulder gear and chamfer size
mm

d _a the min:	738
d _a the max:	769
d _b ,D _a the min:	783
D _a the max:	1002
r _a the max:	6

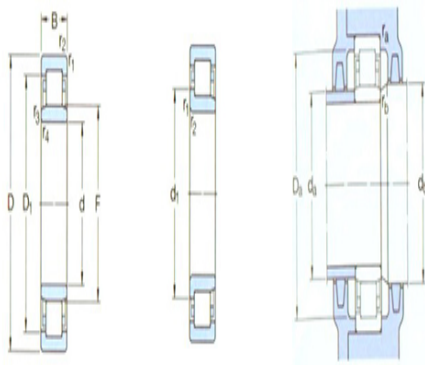

NU

NU

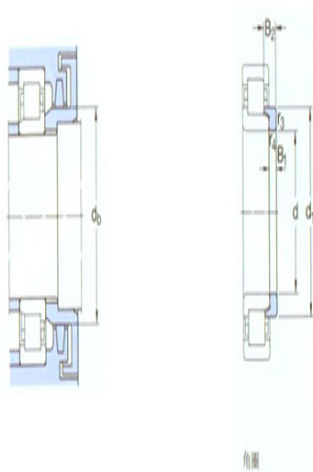

角鋼

r_b the max: 6

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -