



**Model: NU20/750ECMA**

Basic size of  
 mm


d:	750
D:	1090
B:	195

The basic rated load is  
 kN

trends C:	7040
static state Co:	14600
Fatigue load limit Pu:	980


Rated rotation speed is  
 r/min

Refer to the speed:	430
limit speed:	670
quality:	635
model:	NU20/750ECMA

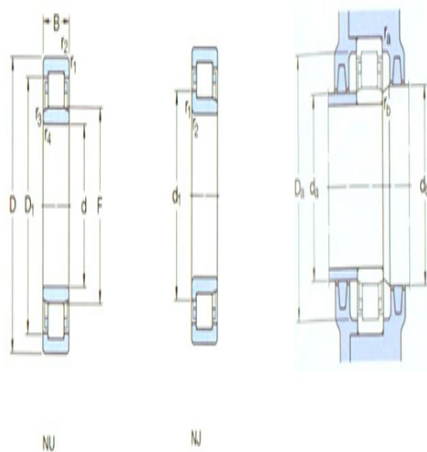

NU

NU

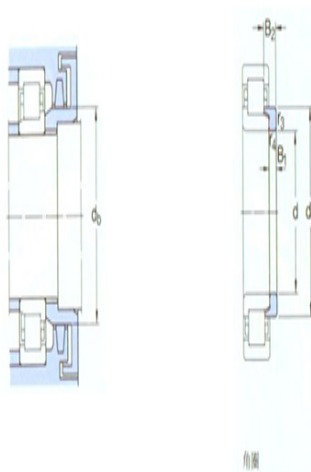

角鋼

Dimensions are  
 mm

d:	750
d <sub>1</sub> ~ :	-
D <sub>1</sub> ~ :	993
F,E:	832
r <sub>1,2</sub> the min:	7.5
r <sub>3,4</sub> the min:	7.5
s <sup>1)</sup> :	2

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	778
d <sub>a</sub> the max:	823
d <sub>b</sub> ,D <sub>a</sub> the min:	838
D <sub>a</sub> the max:	1062
r <sub>a</sub> the max:	6
r <sub>b</sub> the max:	6

Calculation coefficient

kr:	0.14
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-