



Model: NU20/800ECMA

Basic size of
 mm

d:	800
D:	1150
B:	200

The basic rated load is
 kN

trends C:	7040
static state Co:	14600
Fatigue load limit Pu:	950

Rated rotation speed is
 r/min


Refer to the speed:	400
limit speed:	630
quality:	715
model:	NU20/800ECMA

Dimensions are
 mm

d:	800
d ₁ ~ :	-
D1 ~ :	1051
F,E:	882
r _{1,2} the min:	7.5
r _{3,4} the min:	7.5
s ¹⁾ :	2


Shoulder gear and chamfer size
 mm

d _a the min:	828
d _a the max:	868
d _b ,D _a the min:	888
D _a the max:	1122
r _a the max:	6
r _b the max:	6

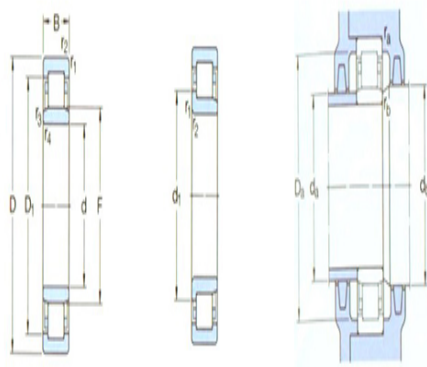

NU

NJ

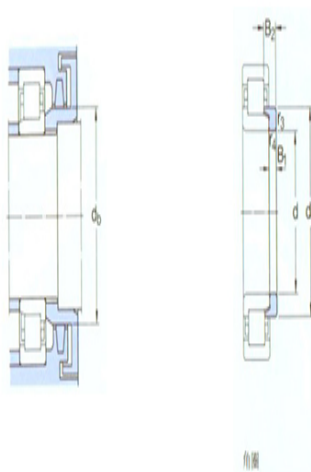

角圖

Calculation coefficient

kr:	0.14
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-