

Model: NJG2306VH

Basic size of
 mm

| | |
|----|----|
| d: | 30 |
| D: | 72 |
| B: | 27 |

The basic rated load is
 kN

| | |
|------------------------|------|
| trends C: | 84.2 |
| static state Co: | 86.5 |
| Fatigue load limit Pu: | 11 |

Rated rotation speed is
 r/min



| | |
|---------------------|-----------|
| Refer to the speed: | 4000 |
| limit speed: | 4800 |
| quality: | 0.56 |
| model: | NJG2306VH |

Dimensions are
 mm

| | |
|---------------------------|-------|
| d: | 30 |
| d ₁ ~ : | 43.2 |
| D1 ~ : | 56.4 |
| E,F: | 38.36 |
| r _{1,2} the min: | 1.1 |
| r _{3,4} the min: | - |
| s ¹⁾ : | 1.8 |

Shoulder gear and chamfer size
 mm

| | |
|--|------|
| d _a the min: | 37 |
| d _{as} ²⁾ suggested value: | 40.8 |
| d _b the max: | 36 |
| Da the max: | 65 |
| Db the max: | - |
| r _a the max: | 1 |

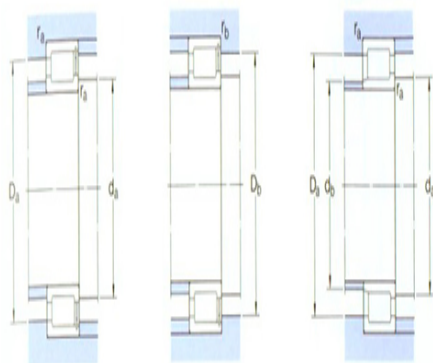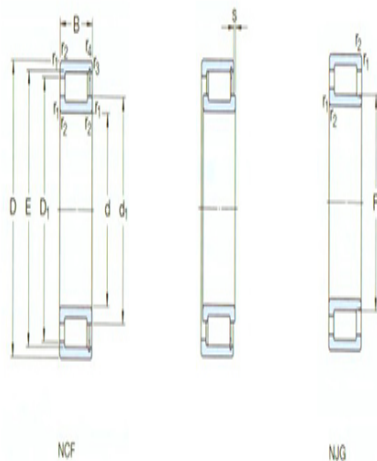

r_b the max:

-