

Model: NJG2309VH

Basic size of
mm

| | |
|----|-----|
| d: | 45 |
| D: | 100 |
| B: | 36 |

The basic rated load is
kN


| | |
|--------------------|------|
| trends C: | 172 |
| static state Co: | 196 |
| Fatigue load limit | 25.5 |
| Pu: | |

Rated rotation speed is
r/min

| | |
|---------------------|---------------|
| Refer to the speed: | 2800 |
| limit speed: | 3400 |
| quality: | 1.45 |
| model: | NJG2309V H |


Dimensions are
mm

| | |
|---------------------------|-------|
| d: | 45 |
| d ₁ ~ : | 62.5 |
| D ₁ ~ : | 80.1 |
| E,F: | 56.14 |
| r _{1,2} the min: | 1.5 |
| r _{3,4} the min: | - |
| s ¹⁾ : | 2.4 |

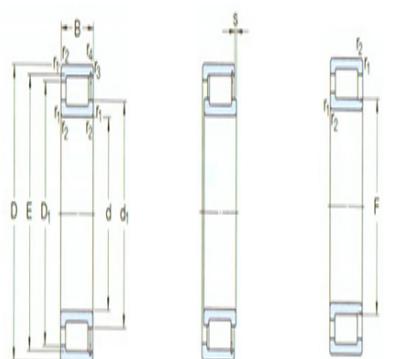

NCF

NJG

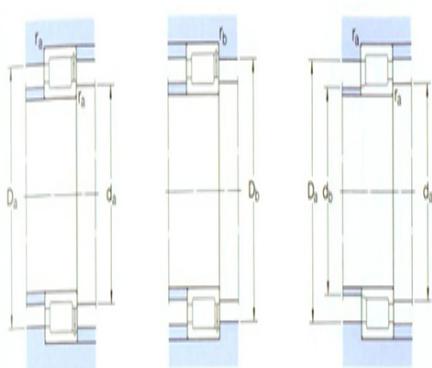

Shoulder gear and chamfer size
mm

| | |
|---|------|
| d _a the min: | 54 |
| d _{as} ²⁾ suggested value: | 59.3 |
| d _b the max: | 54 |
| D _a the max: | 91 |
| D _b the max: | - |
| r _a the max: | 1.5 |

r_b the max:

-