

Model: NJG2313VH

Basic size of
mm

| | |
|----|-----|
| d: | 65 |
| D: | 140 |
| B: | 48 |


The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 303 |
| static state Co: | 360 |
| Fatigue load limit Pu: | 46.5 |

Rated rotation speed is
r/min

| | |
|---------------------|---------------|
| Refer to the speed: | 1900 |
| limit speed: | 2400 |
| quality: | 3.55 |
| model: | NJG2313V H |

Dimensions are
mm

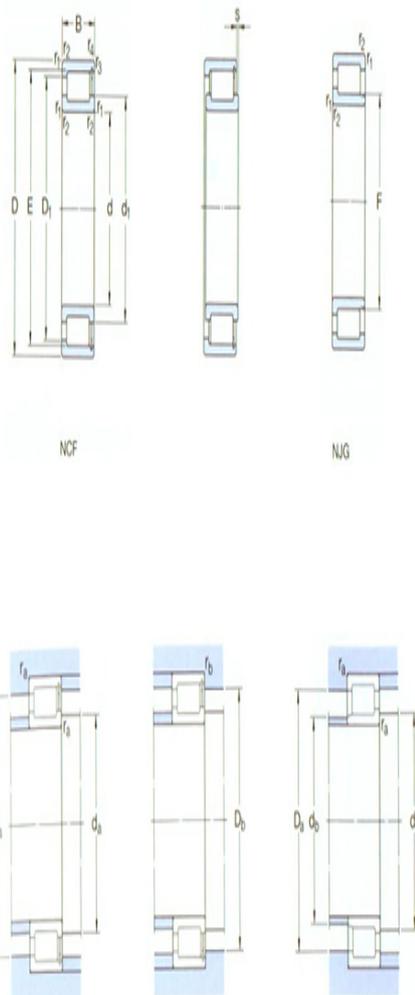

| | |
|---------------------------|-------|
| d: | 65 |
| d ₁ ~ : | 89.9 |
| D ₁ ~ : | 116 |
| E,F: | 80.71 |
| r _{1,2} the min: | 2.1 |
| r _{3,4} the min: | - |
| s ¹⁾ : | 3 |

Shoulder gear and chamfer size
mm

| | |
|--|------|
| d _a the min: | 77 |
| d _{as} ²⁾ suggested value: | 85.3 |
| d _b the max: | 78 |
| Da the max: | 128 |
| Db the max: | - |
| r _a the max: | 2 |

r_b the max:

-