



Model: NJG2314VH

Basic size of
mm

| | |
|----|-----|
| d: | 70 |
| D: | 150 |
| B: | 51 |

The basic rated load is
kN

| | |
|------------------------|-----|
| trends C: | 336 |
| static state Co: | 400 |
| Fatigue load limit Pu: | 50 |

Rated rotation speed is
r/min



| | |
|---------------------|---------------|
| Refer to the speed: | 1800 |
| limit speed: | 2200 |
| quality: | 4.4 |
| model: | NJG2314V H |

Dimensions are
mm

| | |
|---------------------------|-------|
| d: | 70 |
| d ₁ ~ : | 93.8 |
| D1 ~ : | 121 |
| E,F: | 84.22 |
| r _{1,2} the min: | 2.1 |
| r _{3,4} the min: | - |
| s ¹⁾ : | 3 |

Shoulder gear and chamfer size
mm

| | |
|--|-----|
| d _a the min: | 82 |
| d _{as} ²⁾ suggested value: | 89 |
| d _b the max: | 81 |
| Da the max: | 138 |
| Db the max: | - |
| r _a the max: | 2 |

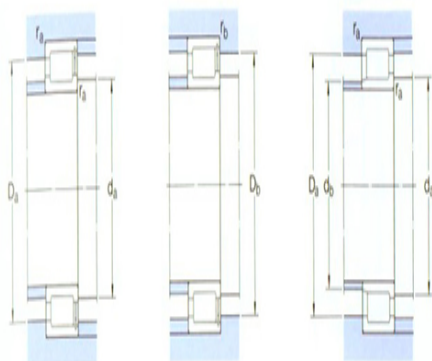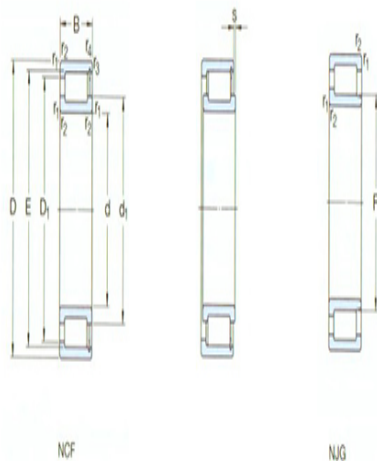

r_b the max:

-