

**Model: NJG2316VH**

Basic size of  
 mm

d:	80
D:	170
B:	58

The basic rated load is  
 kN

trends C:	457
static state Co:	570
Fatigue load limit Pu:	71

Rated rotation speed is  
 r/min



Refer to the speed:	1500
limit speed:	1900
quality:	6.4
model:	NJG2316V H

Dimensions are  
 mm

d:	80
d <sub>1</sub> ~ :	109
D1 ~ :	141
E,F:	98.26
r <sub>1,2</sub> the min:	2.1
r <sub>3,4</sub> the min:	-
s <sup>1)</sup> :	4

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	92
d <sub>as</sub> <sup>2)</sup> suggested value:	104
d <sub>b</sub> the max:	95
Da the max:	158
Db the max:	-
r <sub>a</sub> the max:	2

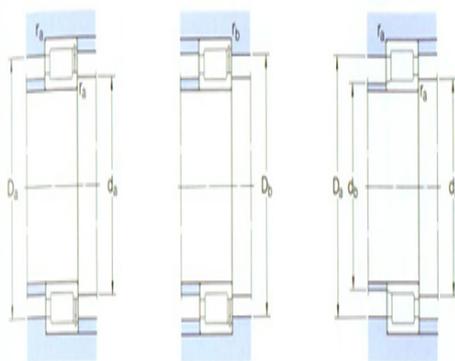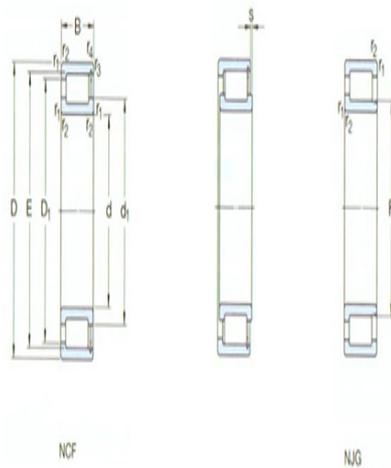

$r_b$  the max: -