



**Model: NNC4956CV**

Basic size of  
 mm

d:	280
D:	380
B:	100

The basic rated load is  
 kN

trends C:	1210
static state Co:	2700
Fatigue load limit Pu:	255

Rated rotation speed is  
 r/min


Refer to the speed:	700
limit speed:	900
quality:	34
model:	NNC4956C V

Dimensions are  
 mm

d:	280
d <sub>1</sub> ~ :	317
D1 ~ :	343
E:	353.34
b <sub>1</sub> :	9.4
k:	5
r <sub>1,2</sub> the min:	2.1
s <sup>1)</sup> :	-


Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	291
d <sub>as</sub> <sup>2)</sup> suggested value:	312
Da the max:	369
r <sub>a</sub> the max:	2

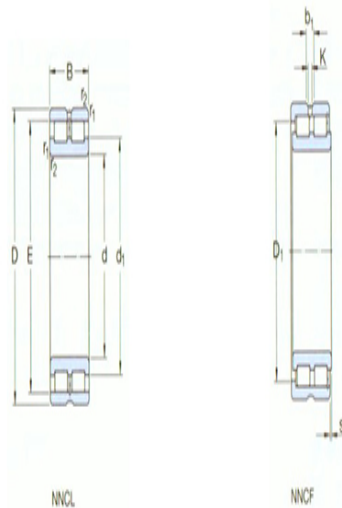

NNCL

NNCF

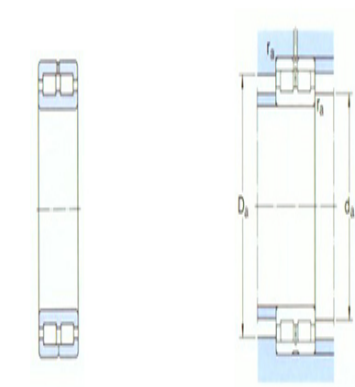

NNC