





Model: NNF5004ADA-2LSV

Basic size of mm

d:	20
D:	42
B:	30
C:	29

The basic rated load is kN

trends C:	44
static state Co:	52
Fatigue load limit Pu:	5.4
rated speed:	3600
quality:	0.21
model:	NNF5004ADA-2LSV

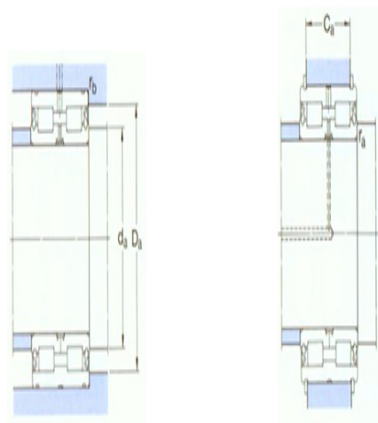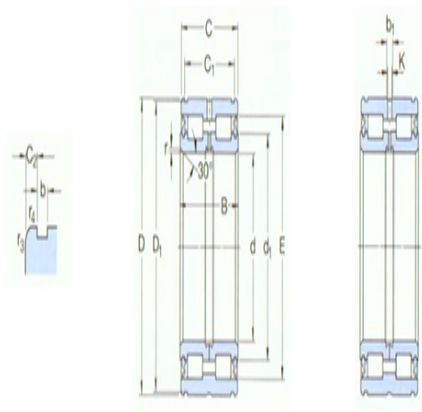

Dimensions are mm

d:	20
d <sub>1</sub> ~ :	28.1
D <sub>1</sub> ~ :	40
E:	35.6
C <sub>1</sub> +0,2:	24.7
C <sub>2</sub> :	2.15
b:	1.9
b <sub>1</sub> :	4.5
k:	3

Shoulder gear and chamfer size <sup>1)</sup>

mm

r the min:	0.5
r <sub>3,4</sub> the min:	0.3
d <sub>a</sub> the min:	24
d <sub>as</sub> <sup>3)</sup> :	26.9

Da the max:	38
C <sub>a1</sub> -0,2:	21.5
C <sub>a2</sub> -0,2:	21
r <sub>a</sub> the max:	0.3
r <sub>b</sub> the max:	0.3

Applicable stop ring <sup>2)</sup>

Model number	SW42
Seeger:	
DIN471:	42×1.75