





**Model: NNF5007ADA-2LSV**

Basic size of mm

|    |    |
|----|----|
| d: | 35 |
| D: | 62 |
| B: | 36 |
| C: | 35 |

The basic rated load is kN

|                        |                 |
|------------------------|-----------------|
| trends C:              | 70.4            |
| static state Co:       | 91.5            |
| Fatigue load limit Pu: | 10.2            |
| rated speed:           | 2200            |
| quality:               | 0.45            |
| model:                 | NNF5007ADA-2LSV |

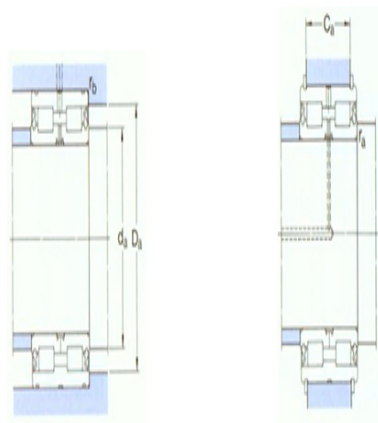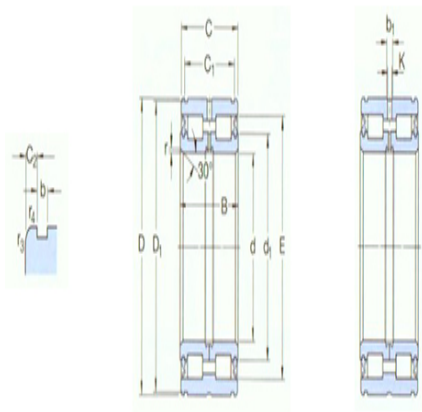

Dimensions are mm

|                      |      |
|----------------------|------|
| d:                   | 35   |
| d <sub>1</sub> ~ :   | 45   |
| D1 ~ :               | 59.8 |
| E:                   | 54.5 |
| C <sub>1</sub> +0,2: | 30.2 |
| C <sub>2</sub> :     | 2.4  |
| b:                   | 2.1  |
| b <sub>1</sub> :     | 4.5  |
| k:                   | 3    |

Shoulder gear and chamfer size <sup>1)</sup> mm

|                                 |      |
|---------------------------------|------|
| r the min:                      | 0.5  |
| r <sub>3,4</sub> the min:       | 0.3  |
| d <sub>a</sub> the min:         | 39   |
| d <sub>as</sub> <sup>3)</sup> : | 43.3 |

|                         |     |
|-------------------------|-----|
| Da the max:             | 60  |
| C <sub>a1</sub> -0,2:   | 27  |
| C <sub>a2</sub> -0,2:   | 26  |
| r <sub>a</sub> the max: | 0.3 |
| r <sub>b</sub> the max: | 0.3 |

Applicable stop ring <sup>2)</sup>

|              |      |
|--------------|------|
| Model number | SW62 |
| Seeger:      |      |
| DIN471:      | 62×2 |