





**Model: NNF5010ADA-2LSV**

Basic size of mm

d:	50
D:	80
B:	40
C:	39

The basic rated load is kN

trends C:	108
static state Co:	160
Fatigue load limit Pu:	18.6
rated speed:	1700
quality:	0.73
model:	NNF5010ADA-2LSV

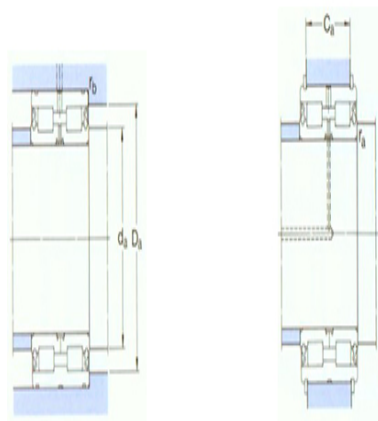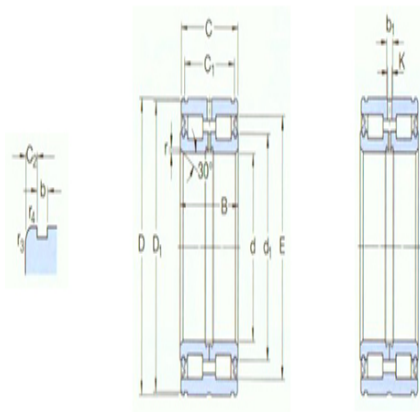

Dimensions are mm

d:	50
d <sub>1</sub> ~ :	61.2
D <sub>1</sub> ~ :	77.8
E:	72.5
C <sub>1</sub> +0,2:	34.2
C <sub>2</sub> :	2.4
b:	2.7
b <sub>1</sub> :	4.5
k:	3

Shoulder gear and chamfer size <sup>1)</sup>

mm

r the min:	0.8
r <sub>3,4</sub> the min:	0.6
d <sub>a</sub> the min:	54
d <sub>as</sub> <sup>3)</sup> :	59.4

Da the max:	75
C <sub>a1</sub> -0,2:	30
C <sub>a2</sub> -0,2:	29
r <sub>a</sub> the max:	0.4
r <sub>b</sub> the max:	0.6

Applicable stop ring <sup>2)</sup>

Model number	SW80
Seeger:	
DIN471:	80×2.5