





**Model: NNF5013ADA-2LSV**

Basic size of mm

d:	65
D:	100
B:	46
C:	45

The basic rated load is kN

trends C:	138
static state Co:	224
Fatigue load limit Pu:	26.5
rated speed:	1300
quality:	1.3
model:	NNF5013ADA-2LSV

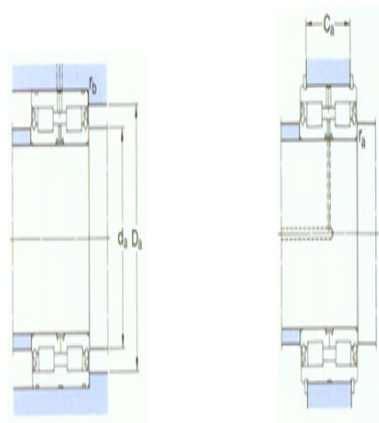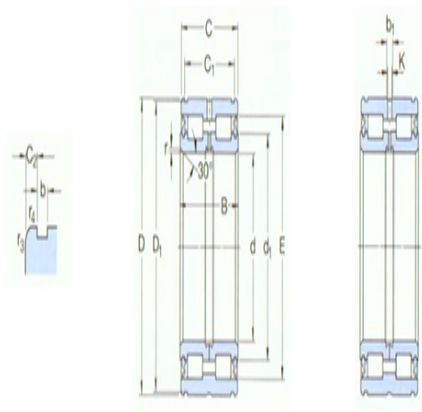

Dimensions are mm

d:	65
d <sub>1</sub> ~ :	78
D <sub>1</sub> ~ :	97.4
E:	90
C <sub>1</sub> +0,2:	40.2
C <sub>2</sub> :	2.4
b:	3.2
b <sub>1</sub> :	4.5
k:	3.5

Shoulder gear and chamfer size <sup>1)</sup>

mm

r the min:	1
r <sub>3,4</sub> the min:	0.6
d <sub>a</sub> the min:	70
d <sub>as</sub> <sup>3)</sup> :	76

Da the max:	95
C <sub>a1</sub> -0,2:	35
C <sub>a2</sub> -0,2:	34
r <sub>a</sub> the max:	0.6
r <sub>b</sub> the max:	0.6

Applicable stop ring <sup>2)</sup>

Model number	SW100
Seeger:	
DIN471:	100×3