





Model: NNF5020ADA-2LSV

Basic size of mm

d:	100
D:	150
B:	67
C:	66

The basic rated load is kN

trends C:	336
static state Co:	570
Fatigue load limit Pu:	68
rated speed:	850
quality:	4.05
model:	NNF5020ADA-2LSV

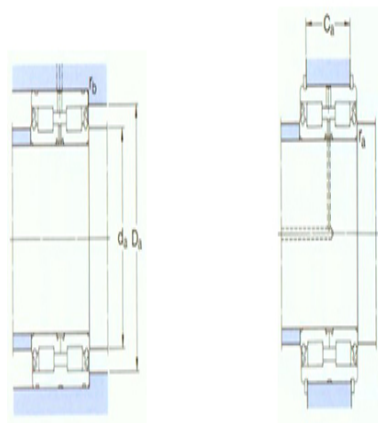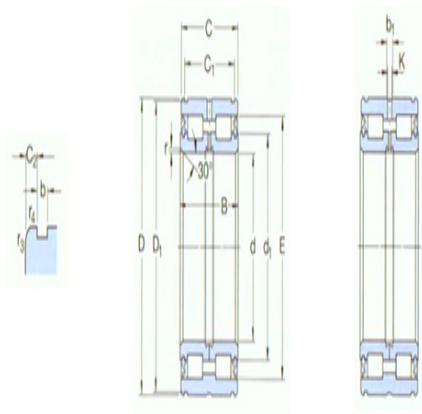

Dimensions are mm

d:	100
d <sub>1</sub> ~ :	118
D <sub>1</sub> ~ :	147
E:	138
C <sub>1</sub> +0,2:	59.2
C <sub>2</sub> :	3.4
b:	4.2
b <sub>1</sub> :	6
k:	3.5

Shoulder gear and chamfer size <sup>1)</sup>

mm

r the min:	1.5
r <sub>3,4</sub> the min:	0.6
d <sub>a</sub> the min:	106
d <sub>as</sub> <sup>3)</sup> :	115

Da the max:	145
C <sub>a1</sub> -0,2:	54
C <sub>a2</sub> -0,2:	51
r <sub>a</sub> the max:	1.5
r <sub>b</sub> the max:	0.6

Applicable stop ring <sup>2)</sup>

Model number	SW150
Seeger:	
DIN471:	150×4