



### Model: 32006X/Q

Basic size of  
mm


d:	30
D:	55
T:	17

The basic rated load is  
kN

trends C:	40.5
static state Co:	44
Fatigue load limit Pu:	4.55

Rated rotation speed is  
r/min

Refer to the speed:	10000
limit speed:	12000
quality:	0.17
model:	*32006X/ Q
ISO335	
Size series (ABMA):	4CC

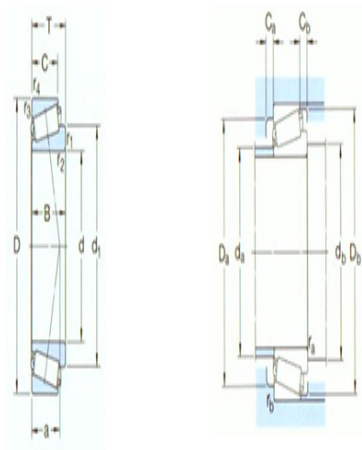

Dimensions are  
mm

d:	30
d <sub>1</sub> ~ :	43
B:	17
C:	13
r <sub>1,2</sub> the min:	1
r <sub>3,4</sub> the min:	1
a:	13

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	35
d <sub>b</sub> the min:	36
Da the min:	48
Da the max:	49
Db the min:	52
Ca the min:	3

Cb the min:	4
r <sub>a</sub> the max:	1
r <sub>b</sub> the max:	1

Calculation coefficient

e:	0.43
Y:	1.4
Yo:	0.8