



## Model: 33207/Q

Basic size of  
mm


d:	35
D:	72
T:	28

The basic rated load is  
kN

trends C:	96.5
static state Co:	106
Fatigue load limit Pu:	11.8

Rated rotation speed is  
r/min

Refer to the speed:	7000
limit speed:	9500
quality:	0.56
model:	*33207/ Q
ISO335	
Size series (ABMA):	2DE

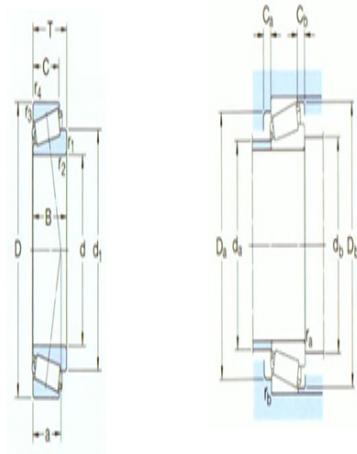

Dimensions are  
mm

d:	35
d <sub>1</sub> ~ :	53.4
B:	28
C:	22
r <sub>1,2</sub> the min:	1.5
r <sub>3,4</sub> the min:	1.5
a:	18

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	42
d <sub>b</sub> the min:	42
Da the min:	61
Da the max:	65
Db the min:	68
Ca the min:	5

Cb the min:	6
r <sub>a</sub> the max:	1.5
r <sub>b</sub> the max:	1.5

Calculation coefficient

e:	0.35
Y:	1.7
Yo:	0.9