



Model: 32013X/Q

Basic size of
mm


| | |
|----|-----|
| d: | 65 |
| D: | 100 |
| T: | 23 |

The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 96.5 |
| static state Co: | 127 |
| Fatigue load limit Pu: | 14 |

Rated rotation speed is
r/min

| | |
|---------------------|---------------|
| Refer to the speed: | 5000 |
| limit speed: | 6000 |
| quality: | 0.63 |
| model: | *32013X/ Q |
| ISO335 | |
| Size series (ABMA): | 4CC |

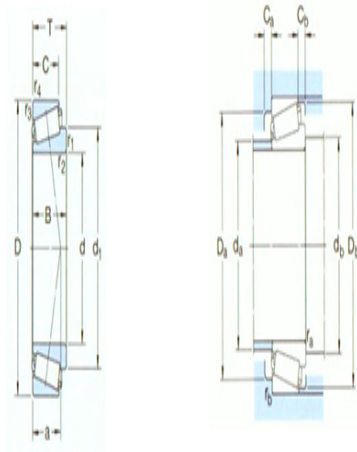

Dimensions are
mm

| | |
|---------------------------|------|
| d: | 65 |
| d ₁ ~ : | 83.3 |
| B: | 23 |
| C: | 17.5 |
| r _{1,2} the min: | 1.5 |
| r _{3,4} the min: | 1.5 |
| a: | 22 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|----|
| d _a the max: | 72 |
| d _b the min: | 72 |
| Da the min: | 90 |
| Da the max: | 93 |
| Db the min: | 97 |
| Ca the min: | 4 |

| | |
|-------------------------|-----|
| Cb the min: | 5.5 |
| r _a the max: | 1.5 |
| r _b the max: | 1.5 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.46 |
| Y: | 1.3 |
| Yo: | 0.7 |