



### Model: T2DD065/Q

Basic size of  
mm


d:	65
D:	110
T:	31

The basic rated load is  
kN

trends C:	138
static state Co:	193
Fatigue load limit Pu:	22.4

Rated rotation speed is  
r/min

Refer to the speed:	4300
limit speed:	6300
quality:	1.15
model:	T2DD065/ Q
ISO335	
Size series (ABMA):	2DD

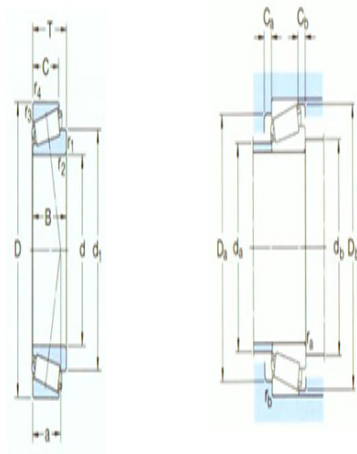

Dimensions are  
mm

d:	65
d <sub>1</sub> ~ :	85.6
B:	31
C:	25
r <sub>1,2</sub> the min:	2
r <sub>3,4</sub> the min:	2
a:	23

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	74
d <sub>b</sub> the min:	75
Da the min:	97
Da the max:	100
Db the min:	105
Ca the min:	5

Cb the min:	6
r <sub>a</sub> the max:	2
r <sub>b</sub> the max:	2

Calculation coefficient

e:	0.35
Y:	1.7
Yo:	0.9