



Model: 30313J2/Q

Basic size of
mm


| | |
|----|-----|
| d: | 65 |
| D: | 140 |
| T: | 36 |

The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 194 |
| static state Co: | 228 |
| Fatigue load limit Pu: | 27.5 |

Rated rotation speed is
r/min

| | |
|---------------------|---------------|
| Refer to the speed: | 3600 |
| limit speed: | 4800 |
| quality: | 2.4 |
| model: | 30313J2/ Q |
| ISO335 | |
| Size series (ABMA): | 2GB |

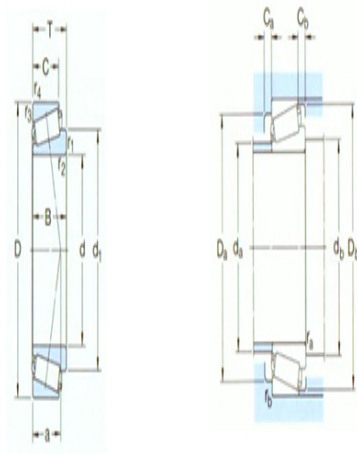

Dimensions are
mm

| | |
|---------------------------|------|
| d: | 65 |
| d ₁ ~ : | 98.6 |
| B: | 33 |
| C: | 28 |
| r _{1,2} the min: | 3 |
| r _{3,4} the min: | 2.5 |
| a: | 28 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _a the max: | 84 |
| d _b the min: | 77 |
| Da the min: | 122 |
| Da the max: | 128 |
| Db the min: | 130 |
| Ca the min: | 5 |

| | |
|-------------------------|-----|
| Cb the min: | 8 |
| r _a the max: | 2.5 |
| r _b the max: | 2 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.35 |
| Y: | 1.7 |
| Yo: | 0.9 |