



**Model: 32021X/Q**

Basic size of  
mm


d:	105
D:	160
T:	35

The basic rated load is  
kN

trends C:	201
static state Co:	335
Fatigue load limit Pu:	37.5

Rated rotation speed is  
r/min

Refer to the speed:	2800
limit speed:	3800
quality:	2.4
model:	32021X/ Q
ISO335	
Size series (ABMA):	4DC

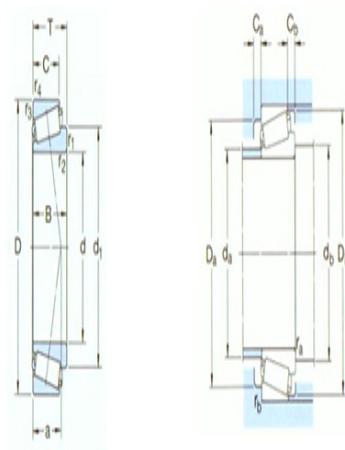

Dimensions are  
mm

d:	105
d <sub>1</sub> ~ :	132
B:	35
C:	26
r <sub>1,2</sub> the min:	2.5
r <sub>3,4</sub> the min:	2
a:	34

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	116
d <sub>b</sub> the min:	116
Da the min:	143
Da the max:	150
Db the min:	154
Ca the min:	6

Cb the min:	9
r <sub>a</sub> the max:	2
r <sub>b</sub> the max:	2

Calculation coefficient

e:	0.44
Y:	1.35
Yo:	0.8