



## Model: 32022X/Q

Basic size of  
mm


d:	110
D:	170
T:	38

The basic rated load is  
kN

trends C:	233
static state Co:	390
Fatigue load limit Pu:	42.5

Rated rotation speed is  
r/min

Refer to the speed:	2600
limit speed:	3600
quality:	3.05
model:	32022X/ Q
ISO335	
Size series (ABMA):	4DC

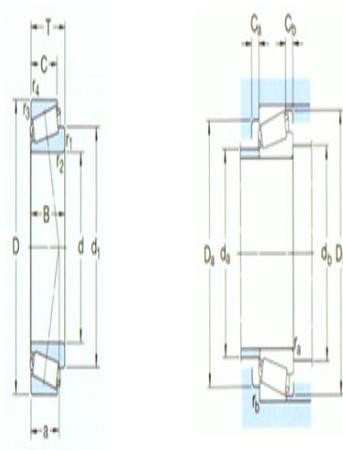

Dimensions are  
mm

d:	110
d <sub>1</sub> ~ :	140
B:	38
C:	29
r <sub>1,2</sub> the min:	2.5
r <sub>3,4</sub> the min:	2
a:	36

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	123
d <sub>b</sub> the min:	121
Da the min:	152
Da the max:	160
Db the min:	163
Ca the min:	7

Cb the min:	9
r <sub>a</sub> the max:	2
r <sub>b</sub> the max:	2

Calculation coefficient

e:	0.43
Y:	1.4
Yo:	0.8