



## Model: 32928

Basic size of  
mm


d:	140
D:	190
T:	32

The basic rated load is  
kN

trends C:	205
static state Co:	390
Fatigue load limit Pu:	40

Rated rotation speed is  
r/min

Refer to the speed:	2200
limit speed:	3400
quality:	2.55
model:	3292
	8
ISO335	
Size series (ABMA):	2CC

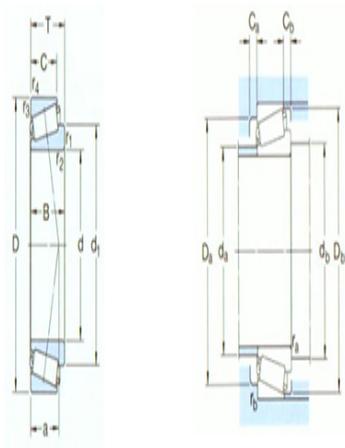

Dimensions are  
mm

d:	140
d <sub>1</sub> ~ :	163
B:	32
C:	25
r <sub>1,2</sub> the min:	2
r <sub>3,4</sub> the min:	1.5
a:	33

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	150
d <sub>b</sub> the min:	150
Da the min:	177
Da the max:	182
Db the min:	184
Ca the min:	6

Cb the min:	7
r <sub>a</sub> the max:	2
r <sub>b</sub> the max:	1.5

Calculation coefficient

e:	0.35
Y:	1.7
Yo:	0.9